





FROM-Fasken Martineau DuMoulin LLP

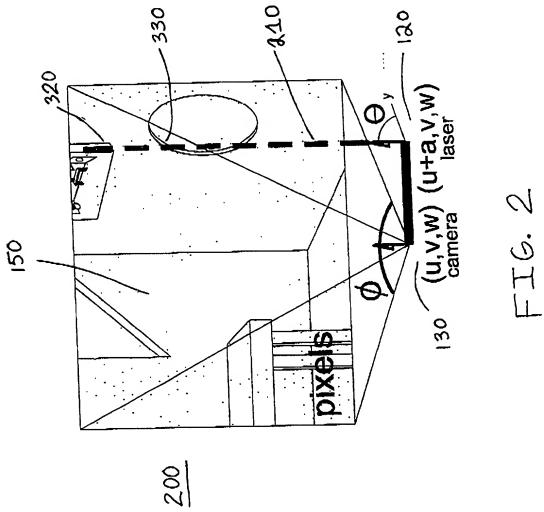


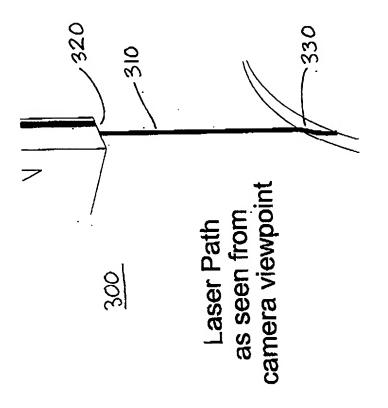

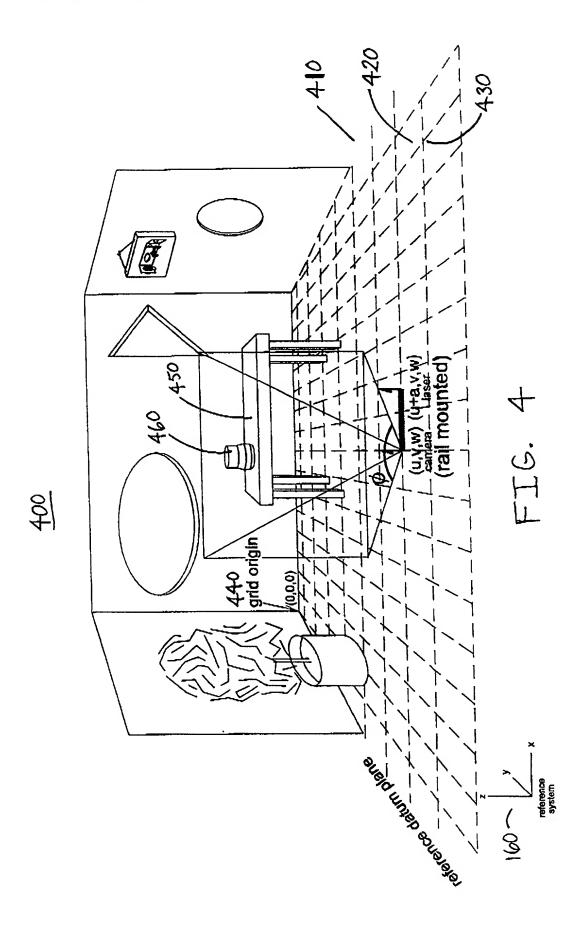

200

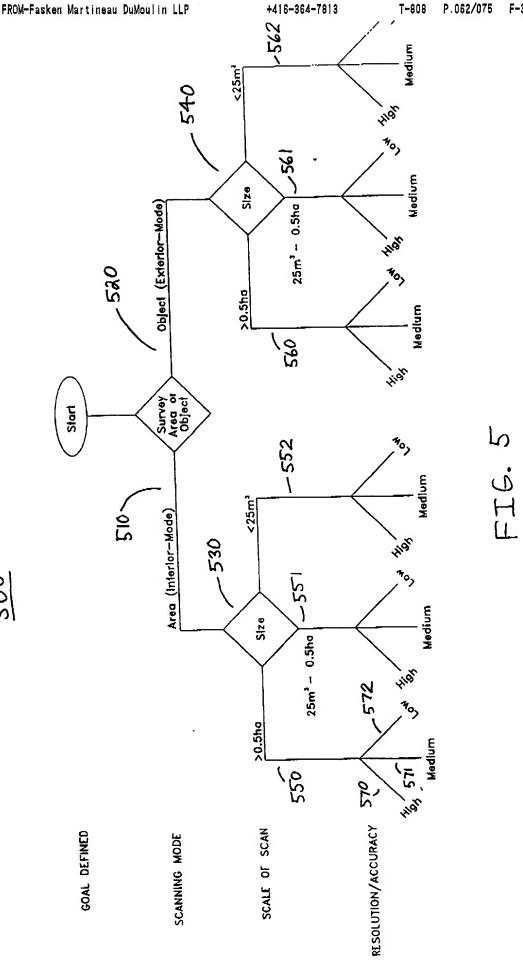

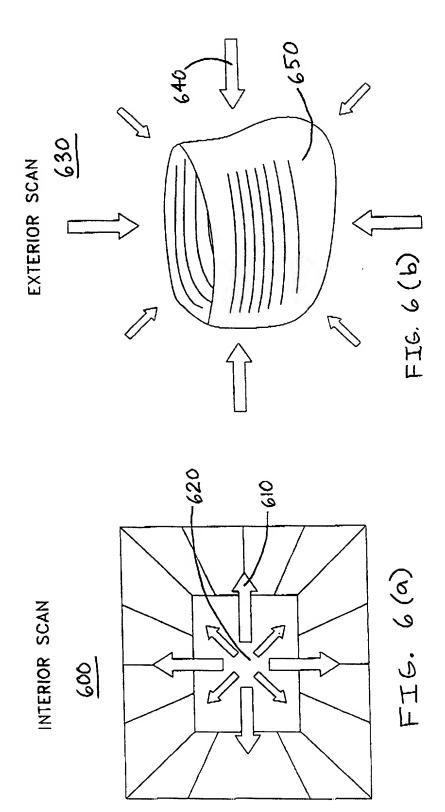

rail in sections for casy transportation 734

751

JASTA CLUSTIRS

LASER CLUSTERS

780

730

RAIL SYSTEW

ADJUSTABLE/ SIGOSELIST

LOCUMENTOR EQUIPMENT

ADJUSTABLE VELESCOPIC


720


MODELLA MANAGEMENT TO CONTRACT TO CONTRACT


795


750 /


740

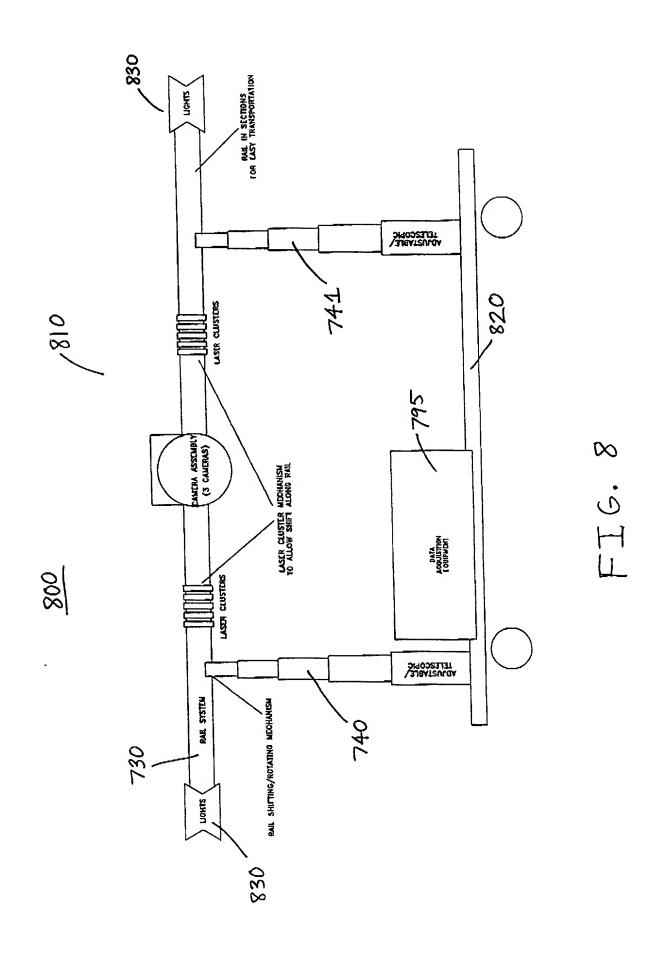


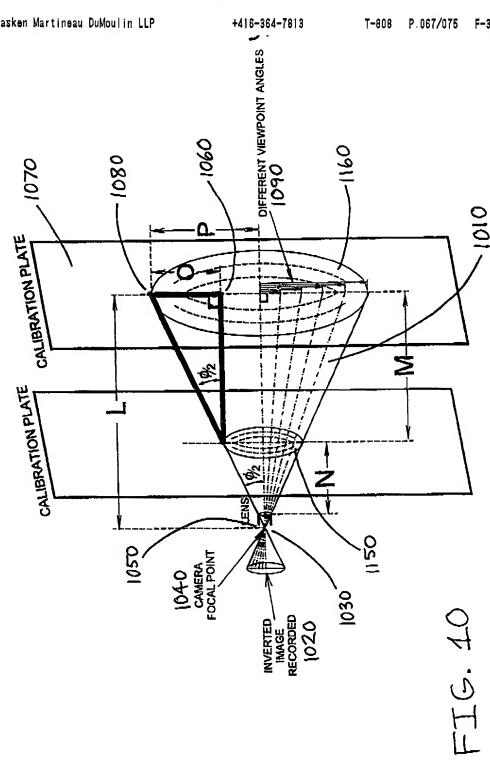


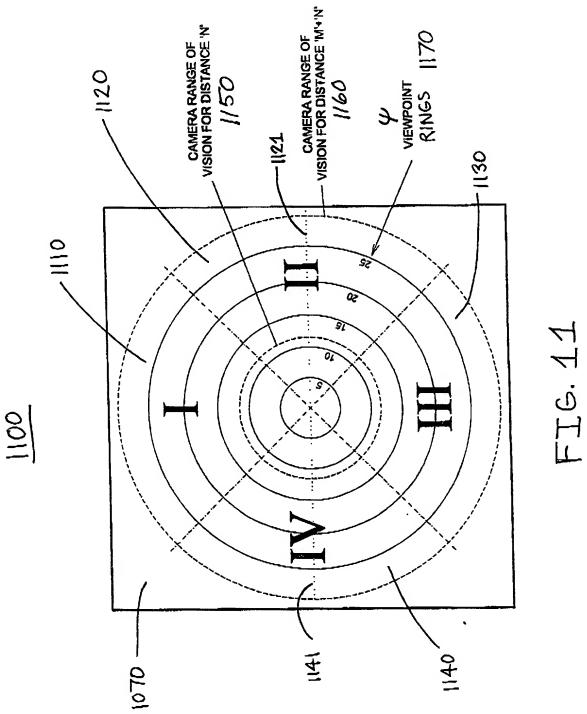

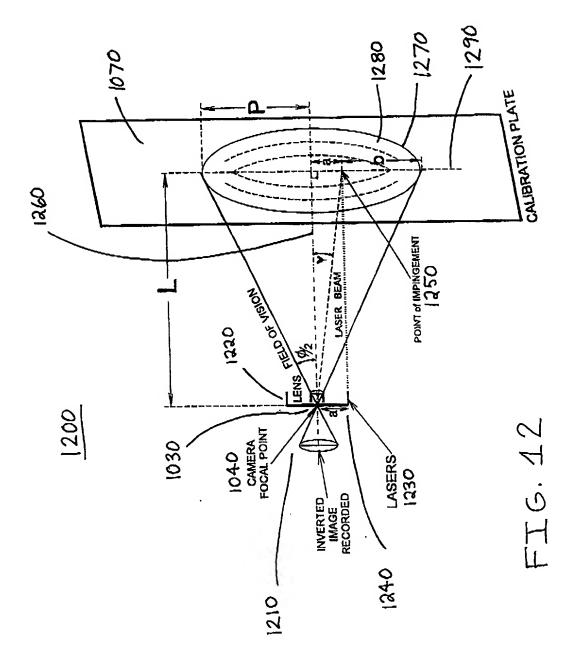

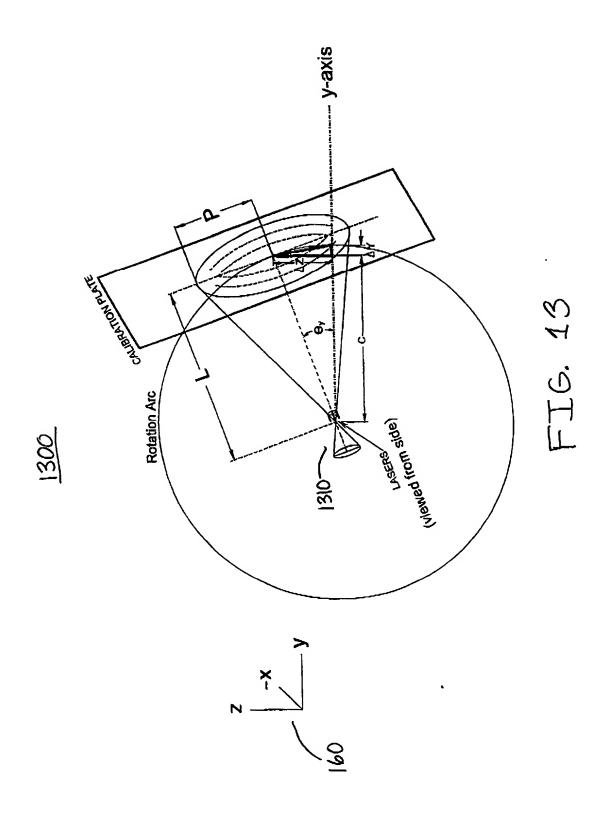


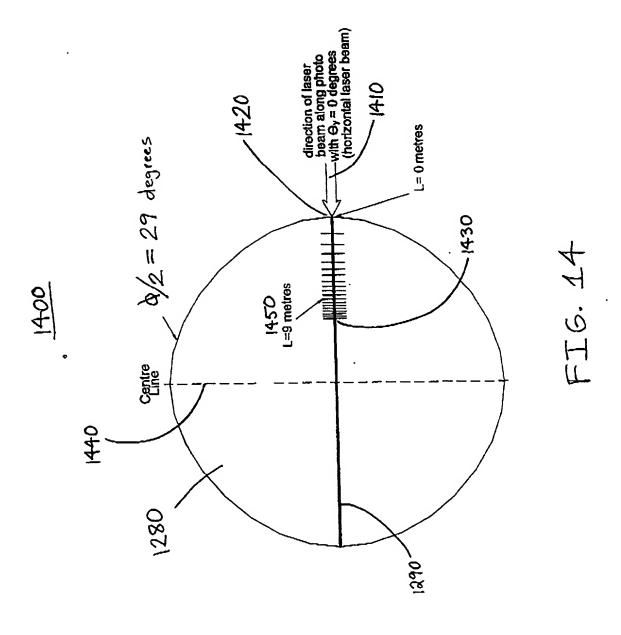

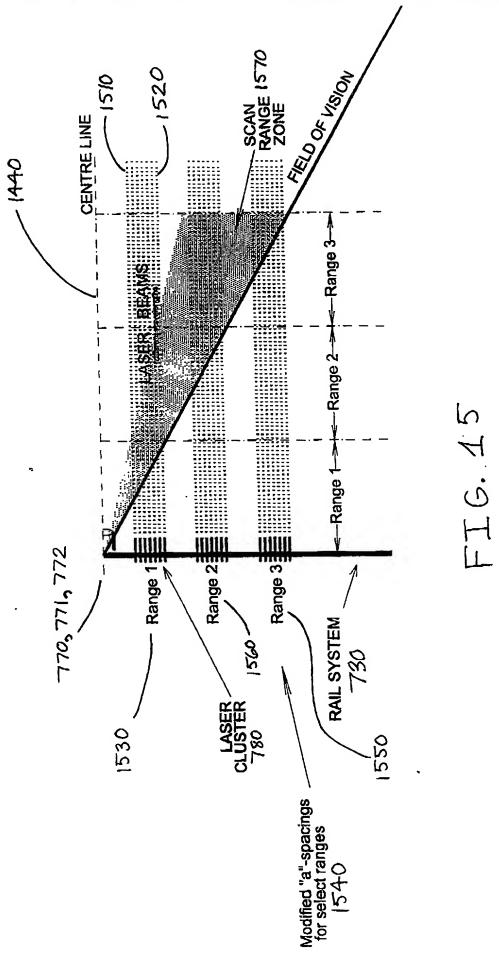

1610	1620	1630	
1010			
	1	1	
,	1	•	
camera	distance	distance	
viewpoint	centre-line	normalized,	
angle (deg.)	to viewpoint		
1.0000	0.0175	0.0315	
2.0000	0.0349	0.0630	
3.0000	0.0524	0.0945	
4.0000	0.0699	0.1262	
5.0000	0.0875	0.1578	
6.0000	0.1051	0.1896	
7.0000	0.1228	0.2215	
8.0000	0.1405	0.2535	
9.0000	0.1584	0.2857	1100
10.0000	0.1753	0.3181	1600
11.0000	0.1944	0.3507	
12.0000	0.2126	0.3835	
13.0000	0.2309	0.4165	
14.0000	0.2493	0.4498	
15.0000	0.2679	0.4834	
16.0000	0.2867	0.5173	
17.0000	0.3057	0.5516	
18.0000	0 3249	0.5862	
19.0000	0.3443	0.6212	
20.0000	0.3640	0.6566	
21.0000	0.3839	0.6925	
22.0000	0,4040	0.7289	
23.0000	0.4245	0 7658	
24.0000	0.4452	0.8032	
25.0000	0.4663	0.8412	
26.0000	0.4877	0.8799	
27.0000	0.5095	0.9192	
28.0000	0.5317	0.9592	
29.0000	0.5543	1.0000	
Ψ			

FIG. 16

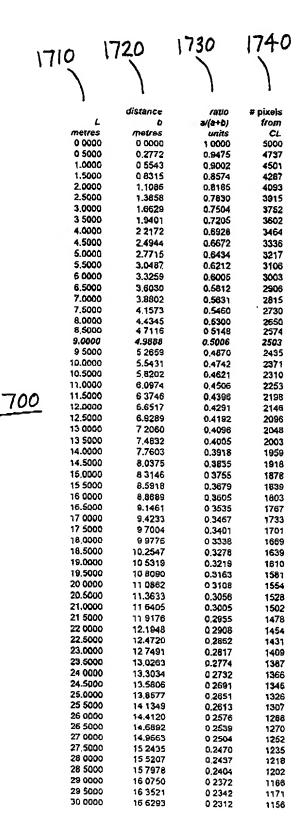

Laser Movement on Image




FIG. 17(6)

FIG. 17(a)

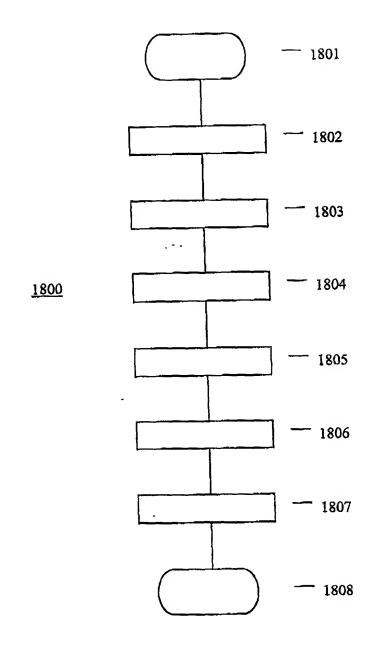


FIG. 18